



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ


C1204/4495

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

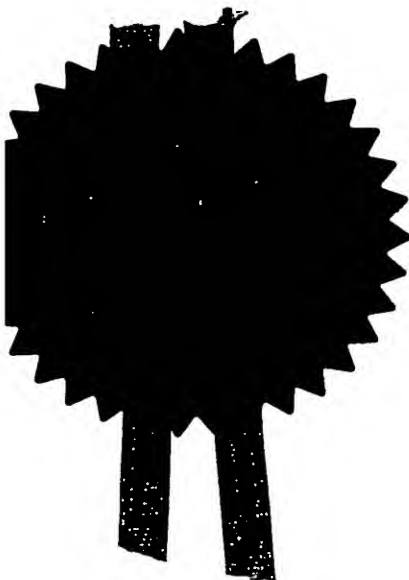

Signed

M. S. Jones


Dated

10 November 2004

20 FEB 2004



23FEB04 E875102-1 0016311133 2355000
P01/7700 0100-0403859.2 NONE

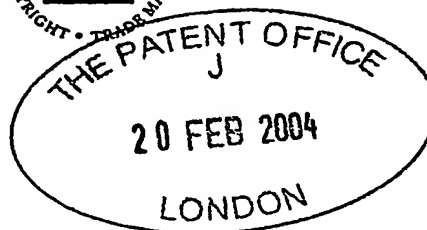

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference 46806.GB02

2. Patent application number
(The Patent Office will fill this part in) 0403859.2

3. Full name, address and postcode of the or of each applicant (underline all surnames)

 Patents ADP number (if you know it)

 If the applicant is a corporate body, give the country/state of its incorporation

The Company of Animals Limited
Ruxbury Farm
St. Annes Hill Road
Chertsey
Surrey KT16 9NL

ENGLAND

08292898001

4. Title of the invention ANIMAL HARNESS

5. Name of your agent (if you have one)

 "Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Reddie & Grose
16 Theobalds Road
LONDON WC1X 8PL

Patents ADP number (if you know it) 91001 ✓

6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last 12 months.	Country	Priority application number (if you know it)	Date of filing (day / month / year)
	GB	0324767.3	23/10/2003

7. Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute (see note f)	Number of earlier UK application	Date of filing (day / month / year)

8. Is a Patents Form 7/77 (Statement of inventorship and of right to grant of a patent) required in support of this request? YES

Answer YES if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

Otherwise answer NO (See note d)


Patents Form 1/77

Accompanying documents: A patent application must include a description of the invention. Not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form

Description	10
Claim(s)	3
Abstract	
Drawing(s)	6



6 

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for a preliminary examination and search (Patents Form 9/77)

Request for a substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

20/2/04

Signature(s)

Reddie & Grase

Date

12. Name, daytime telephone number and e-mail address, if any, of person to contact in the United Kingdom

N. MARLOW
020 7242 0901

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered YES in part 8, a Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under section 8(3), 12(6) or 37(4) following an entitlement dispute. By completing part 7 you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date(s) as the earlier UK application, you should also complete part 6 with the priority details.

ANIMAL HARNESS

The present invention relates to a harness for animals, especially quadruped animals, and finds particular
5 application in harnesses for dogs.

Conventionally a dog is led by a leading strap, or lead, attached to a collar around the neck of the dog. A lead and collar is to an extent effective to restrain a dog, although
10 it can be uncomfortable for a dog which pulls against the lead, but this arrangement cannot be used to guide the dog to turn to the left or right; it can only be used to pull the dog to the left or right. Harnesses which pass around the body of the dog and to which a lead is attached to the
15 middle of the harness strap across the back of the dog are also known. Such a harness is effective to restrain a dog but again can only be used to pull a dog to the left or right, not to guide it.

20 A dog halter mounted around the nose and neck of the dog is also known. A neck loop is attached to a nose loop by cheek straps running between the neck and nose loops and a chin strap running between the neck loop and a cinch around the nose loop under the jaw of the dog. A lead is attached to
25 the loop which passes through the cinch. Such a halter is sold under the registered trade mark HALTI. This halter allows a dog to be restrained without discomfort to the dog and to be guided to the left or right, as the dog's head can be turned to the left or right by pulling on the lead.

30
It has been desired to provide a harness which can restrain a dog without discomfort and which can be used to guide the dog to the left or right, rather than simply pulling it. Harnesses may be preferable to halters for some dogs and
35 other animals since the force exerted on the dog by the

halter is spread over a wider and stronger part of the body of the dog. A dog harness provided by Soft Touch Concepts of Fremont, California, USA has an attachment point for a lead which is fixed on a strap which lies across the chest of the dog. However, when the lead is pulled to the left or right to turn the dog, the harness has a tendency to rotate around the dog which reduces its effectiveness and may be uncomfortable for the dog.

According to the invention there is provided a harness for a quadruped animal including a chest strap which in use of the harness lies across the chest of the animal in front of the forelegs, the harness including an attachment for a leading strap, the attachment being slidably mounted on the chest strap for movement therealong. Preferably, each end of the chest strap is attached to a trunk loop which in use of the harness passes around the trunk of the animal behind the forelegs. The trunk loop preferably comprises a back strap which in use of the harness lies across the back of the animal affixed to a lower strap which in use of the harness passes under the animal behind the forelegs. In one preferred embodiment of the invention, a second attachment for a leading strap is provided on the back strap.

Particularly preferably, the harness includes a stabilising link, one end of which is mounted on the chest strap and the other end of which is adapted to be attached in use of the harness to a collar around the neck of the animal. More preferably, the stabilising link is slidably mounted on the chest strap for movement therealong, and yet more preferably the attachment for a leading strap and the stabilising link are connected so as to move together along the chest strap.

The straps of the harness may be of a webbing material or any other material appropriate for use in animal harness,

and may be lined with neoprene or other soft material. Preferably, the material for the chest strap is chosen so that the attachment for the leading strap cannot move along it so easily that the harness is ineffective to guide the
5 animal (in the manner described below in the description of a preferred embodiment). Synthetic webbing such as a polyester webbing has been found to be a suitable material for the chest strap.

10 Also according to the invention there is provided a method of controlling a dog or other quadruped animal comprising placing a harness according to the invention on the animal and attaching a leading strap to the or each attachment for a leading strap.

15 The invention will be further described with reference to the drawings in which:

Figure 1 is a perspective view of a harness according to a
20 first preferred embodiment of the invention;
Figure 2 is a side elevation of the harness of Figure 1;
Figure 3 shows the harness of Figures 1 and 2 on a dog;
Figure 4 is a perspective view of a harness according to a second preferred embodiment of the invention;
25 Figure 5 is a side elevation of the harness of Figure 4; and
Figure 6 shows the harness of Figures 4 and 5 on a dog.

The harness 10 of the first preferred embodiment of the invention shown in figures 1, 2 and 3 of the drawings is for
30 a dog. It comprises a chest strap 12 each end of which is attached to a trunk loop 14 by one of two pivot rings 16 in the trunk loop. The trunk loop 14 comprises a back strap 18 attached at each end to an end of a lower strap 20 by the pivot rings 16. The lower strap 20 includes a clasp 22 by
35 which the trunk loop 14 can be opened.

- A loop 24 of the chest strap 12 passes through a cinch ring 26 and is prevented from passing back through the cinch ring by a lead ring 28 to which a lead 30 can be attached; the
5 portion of the chest strap forming the loop 24 passes through the lead ring 28. The lead ring 28 is of a diameter to prevent the cinch ring 26 from coming off the chest strap 12.
- 10 A stabilising link consists of a stabilising strap 32 attached to the cinch ring 26 and an openable spring clip 34 on the free end of the stabilising strap 32. The stabilising strap 32 is of such a length that when it is in place on a dog, the clip 34 can be attached to a ring 36
15 which is slidable on the collar 38 of a dog 40, as can be seen in Figure 3, so that in use the chest strap 12 is retained in the correct position across the chest of the dog 40.
- 20 The chest 12, back 18 and lower 20 straps of the harness are provided with length adjusters 44 so that the harness can accommodate a range of sizes of dogs; the stabilising strap 32 can also be provided with an adjuster.
- 25 In use, as can be seen in Figure 3, the harness 10 is placed on a dog 40 so that the chest strap 12 passes across the chest of the dog in front of its forelegs 42, the back strap 18 passes over the back of the dog in the region of its forelegs 42 and the lower strap 20 passes under the dog
30 immediately behind its forelegs 42. The clasp 22 in the lower strap 20 is opened to allow the harness to be placed around the dog 40 and closed when the harness is in position on the dog.

The clip 34 on the end of the stabilising strap 32 is attached to a ring 36 slidable on a collar 38 around the neck of the dog. The stabilising link 32, 34 helps to maintain the chest strap 12 in the correct position across the chest of the dog. A lead 30 is attached to the lead ring 28 the chest strap 12.

When a dog wearing the harness 10 is being walked, the lead 30 can be held to either the left or right side of the dog. In normal forward walking, the cinch ring 26 and the lead ring 28 will lie midway across the chest of the dog. If the dog pulls against the lead, it is readily restrained; the stabilising link 32, 34 prevents the chest strap 12 from slipping back on the chest of the dog in this situation. It has been found that a dog wearing a harness according to the invention is less likely to pull against the lead than if it is being led otherwise.

To turn the dog in the direction of the side of the dog to which the lead passes, the lead is pulled gently in that direction. This causes the back strap 18 to apply gentle pressure to the dog in the region of its opposite shoulder and the dog is encouraged to turn toward the lead. At the same time, slippage of the harness 10 around the body of the dog is avoided by the lead ring 26 and the cinch ring 24, and so the stabilising link 32, 34, sliding along the chest strap 12 of the harness in the direction in which the lead is being pulled. The arrangement of the cinch ring 24 and the lead ring 26 means that the rings do not slide entirely freely on the chest strap 12, but slide sufficiently to avoid slippage of the harness while gentle pressure is applied to the opposite shoulder of the dog by the back strap 18. The chest strap 12 is restrained against backward movement on the dog's chest by the stabilising link 32, 34.

To turn the dog in the other direction, the lead can be brought across in front of the dog so that it passes to the other side of the dog; the turning process is then as described above. Alternatively, the lead can remain on the same side of the dog, that is the side opposite to which the dog is to turn. The lead is gently pulled against the neck of the dog to urge it to turn away from the lead.

If a dog wearing a harness 10 is reluctant to walk forward, it can be encouraged to do so by gentle pulling of the lead.

The pivot rings 16 in the trunk loop 14 to which the chest 12, back 18 and lower 20 straps are attached allow the straps to move relative to each other without distortion. The harness can flex as the dog moves while the straps remain substantially flat on the dog's body.

The harness 60 of the second preferred embodiment of the invention shown in figures 4, 5 and 6 of the drawings is also for a dog. This harness 60 of this embodiment comprises a chest strap 62 each end of which is attached to a trunk loop 64. The ends of the chest strap 62 pass through loops 66 in the trunk loop 64 and are attached to adjusters 100 on the chest strap to secure the chest strap to the trunk loop. The trunk loop 64 comprises a back strap 68 continuous with a lower strap 70. The lower strap 70 includes a clasp 72 by which the trunk loop 64 can be opened.

A loop 74 of the chest strap 62 passes through a cinch ring 76 and is prevented from passing back through the cinch ring by a first lead ring 78 to which a lead 80 can be attached; the portion of the chest strap forming the loop 74 passes through the first lead ring 78. The first lead ring 78 is

of a diameter to prevent the cinch ring 76 from coming off the chest strap 62.

In this embodiment the stabilising link consists of an openable spring clip 84 attached to the cinch ring 76. The spring clip 84 is of such a length that when in place on a dog, it can be attached to a ring 86 which is slidable on the collar 88 of a dog 90, as can be seen in Figure 3, so that in use the chest strap 62 is in the correct position across the chest of the dog 90.

In addition to the length adjusters 100 provided on the chest 62 strap the back strap 68 is provided with length adjusters 102 and the lower strap 70 is provided with a length adjuster 104 so that the harness can accommodate a range of sizes of dogs. The free end of the trunk loop 64 which emerges from the adjuster 104 in the lower strap 70 is retained by a retaining loop 106 on the lower strap 70.

The back strap 68 is provided with a second lead ring 108, generally in the middle of the back strap 68; ends of the material of the trunk loop 64 are attached to the second lead ring 108 to close the loop.

In use, as can be seen in Figure 6, the harness 60 is placed on a dog 90 so that the chest strap 62 passes across the chest of the dog in front of its forelegs 92, the back strap 68 passes over the back of the dog in the region of its forelegs 92 and the lower strap 70 passes under the dog immediately behind its forelegs 92. The clasp 72 in the lower strap 70 is opened to allow the harness to be placed around the dog 90 and closed when the harness is in position on the dog.

The stabilising link clip 84 is attached to a ring 86 slidable on a collar 88 around the neck of the dog. The stabilising link clip 84 helps to maintain the chest strap 62 in the correct position across the chest of the dog. A
 5 lead 80 is attached to the first lead ring 78 on the chest strap 62 and to the second lead ring 108 on the back strap 68. The harness 60 of this embodiment is particularly well suited to use with a single lead 80 having a clip for attachment to a lead ring at each end.

10

The harness of this embodiment is used to control a dog in much the same way as the harness of the first preferred embodiment. When a dog wearing the harness 60 is being walked, the lead 80 can be held so that the end portion
 15 attached to the first lead ring 78 on the chest strap 62 is to either the left or right side of the dog. In normal forward walking, the cinch ring 76 and the first lead ring 78 will lie midway across the chest of the dog. If the dog pulls against the lead, it is readily restrained; the
 20 stabilising link clip 84 prevents the chest strap 62 from slipping back on the chest of the dog in this situation.

To turn the dog in the direction of the side of the dog to which the lead passes, the lead is pulled gently in that
 25 direction. This causes the back strap 78 to apply gentle pressure to the dog in the region of its opposite shoulder and the dog is encouraged to turn toward the lead. At the same time, the lead 80 is held relatively close to the end attached to the second lead ring 108 on the back strap 68 so
 30 that the dog pivots about that end of the lead as it turns. Slippage of the harness 60 around the body of the dog is avoided by the lead ring 76 and the cinch ring 74, and so the stabilising link clip 84, sliding along the chest strap 62 of the harness in the direction in which the lead is
 35 being pulled, and by the action of the lead 80 on the second

lead ring 108 and so on the back strap 68. The arrangement of the cinch ring 74 and the first lead ring 76 means that the rings do not slide entirely freely on the chest strap 62, but slide sufficiently to avoid slippage of the harness while gentle pressure is applied to the opposite shoulder of the dog by the back portion 78 of the trunk loop 64. The chest strap 62 is restrained against backward movement on the dog's chest by the stabilising link clip 84.

10 To turn the dog in the other direction, the lead can be brought across in front of the dog so that it passes to the other side of the dog; the turning process is then as described above. Alternatively, the lead can remain on the same side of the dog, that is the side opposite to which the dog is to turn. The lead is gently pulled against the neck of the dog to urge it to turn away from the lead. Again, the dog pivots about the end of the lead 80 attached to the second lead ring 108 on the back strap 68 as it turns.

20 If a dog wearing a harness 60 is reluctant to walk forward, it can be encouraged to do so by gentle pulling of the lead.

The straps of the harnesses 10, 60 are of a webbing material, and some or all of them may be lined with neoprene. The width and thickness of the straps will depend upon the size and strength of the dog for which the harness is intended. Typically, the width of the straps is from 1 cm to 3 cm and the thickness of the straps is about 1 mm.

30 The leads 30, 80, the collars 38, 88, the rings 36, 86 on the collars 38, 88, and the dogs 40, 90 shown in Figures 3 and 6 form no part of the present invention.

The present invention thus provides a harness for dogs and quadruped animals which allows an animal to be readily and

effectively controlled by means of a lead without inflicting discomfort on the animal.

CLAIMS

1. A harness for a quadruped animal including a chest
5 strap which in use of the harness lies across the chest of
the animal in front of the forelegs the harness including an
attachment for a leading strap, the attachment being
slidably mounted on the chest strap for movement therealong.
- 10 2. A harness according to claim 1 in which the attachment
for a leading strap is a ring through which the chest strap
passes.
- 15 3. A harness according to claim 1 or 2 further comprising
a stabilising link one end of which is mounted on the chest
strap and the other end of which is adapted to be attached
in use of the harness to a collar around the neck of the
animal.
- 20 4. A harness according to claim 3 in which the
stabilising link is slidably mounted on the chest strap for
movement therealong.
- 25 5. A harness according to claim 4 in which the attachment
for a leading strap and the stabilising link are connected
so as to be able to move together along the chest strap.
6. A harness according to claim 3, 4 or 5 in which the
stabilising link is attached to a cinch through which a loop
30 of the chest strap passes.
7. A harness according to claim 6 in which the attachment
for a leading strap is mounted on the said loop of the chest
strap whereby the cinch is retained on the chest strap.

8. A harness according to any preceding claim further comprising a trunk loop which to which each end of the chest strap is attached, the trunk loop in use of the harness passing around the trunk of the animal behind the forelegs.
- 5 9. A harness according to claim 8 in which the trunk loop comprises a back strap which in use of the harness lies across the back of the animal affixed to a lower strap which in use of the harness passes under the animal behind the
- 10 forelegs.
10. A harness cording to claim 9 in which the back strap is pivotably affixed to the lower strap
- 15 11. A harness according to claim 9 or 10 in which a second attachment for a leading strap is provided on the back strap.
12. A harness according to claim 9, 10 or 11 in which the
- 20 ends of the chest strap are pivotably attached to the trunk loop where the back strap meets the lower strap.
13. A harness according to claim 8, 9, 10, 11 or 12 in which the trunk loop includes a clasp by which it can be
- 25 opened to in use of the harness allow the harness to be placed on or removed from an animal.
14. A harness according to any preceding claim in which the length of at least one strap or loop is adjustable.
- 30 15. A harness according to any preceding claim for a dog.
16. A harness according to any preceding claim in which the attachment on the chest strap for a leading strap is
- 35 constrained against free movement along the chest strap.

17. A harness according to any preceding claim in which the second attachment for a leading strap is constrained against free movement along the back strap.

5

18. A harness according to any preceding claim in which the chest strap is of a polyester webbing.

19. A harness substantially as described with reference to the drawings.

10

20. A method of controlling a dog or other quadruped animal comprising:

placing a harness according to any preceding claim on the animal; and

15

attaching a leading strap to the or each attachment for a leading strap.

21. A method of controlling a dog substantially as described.

20

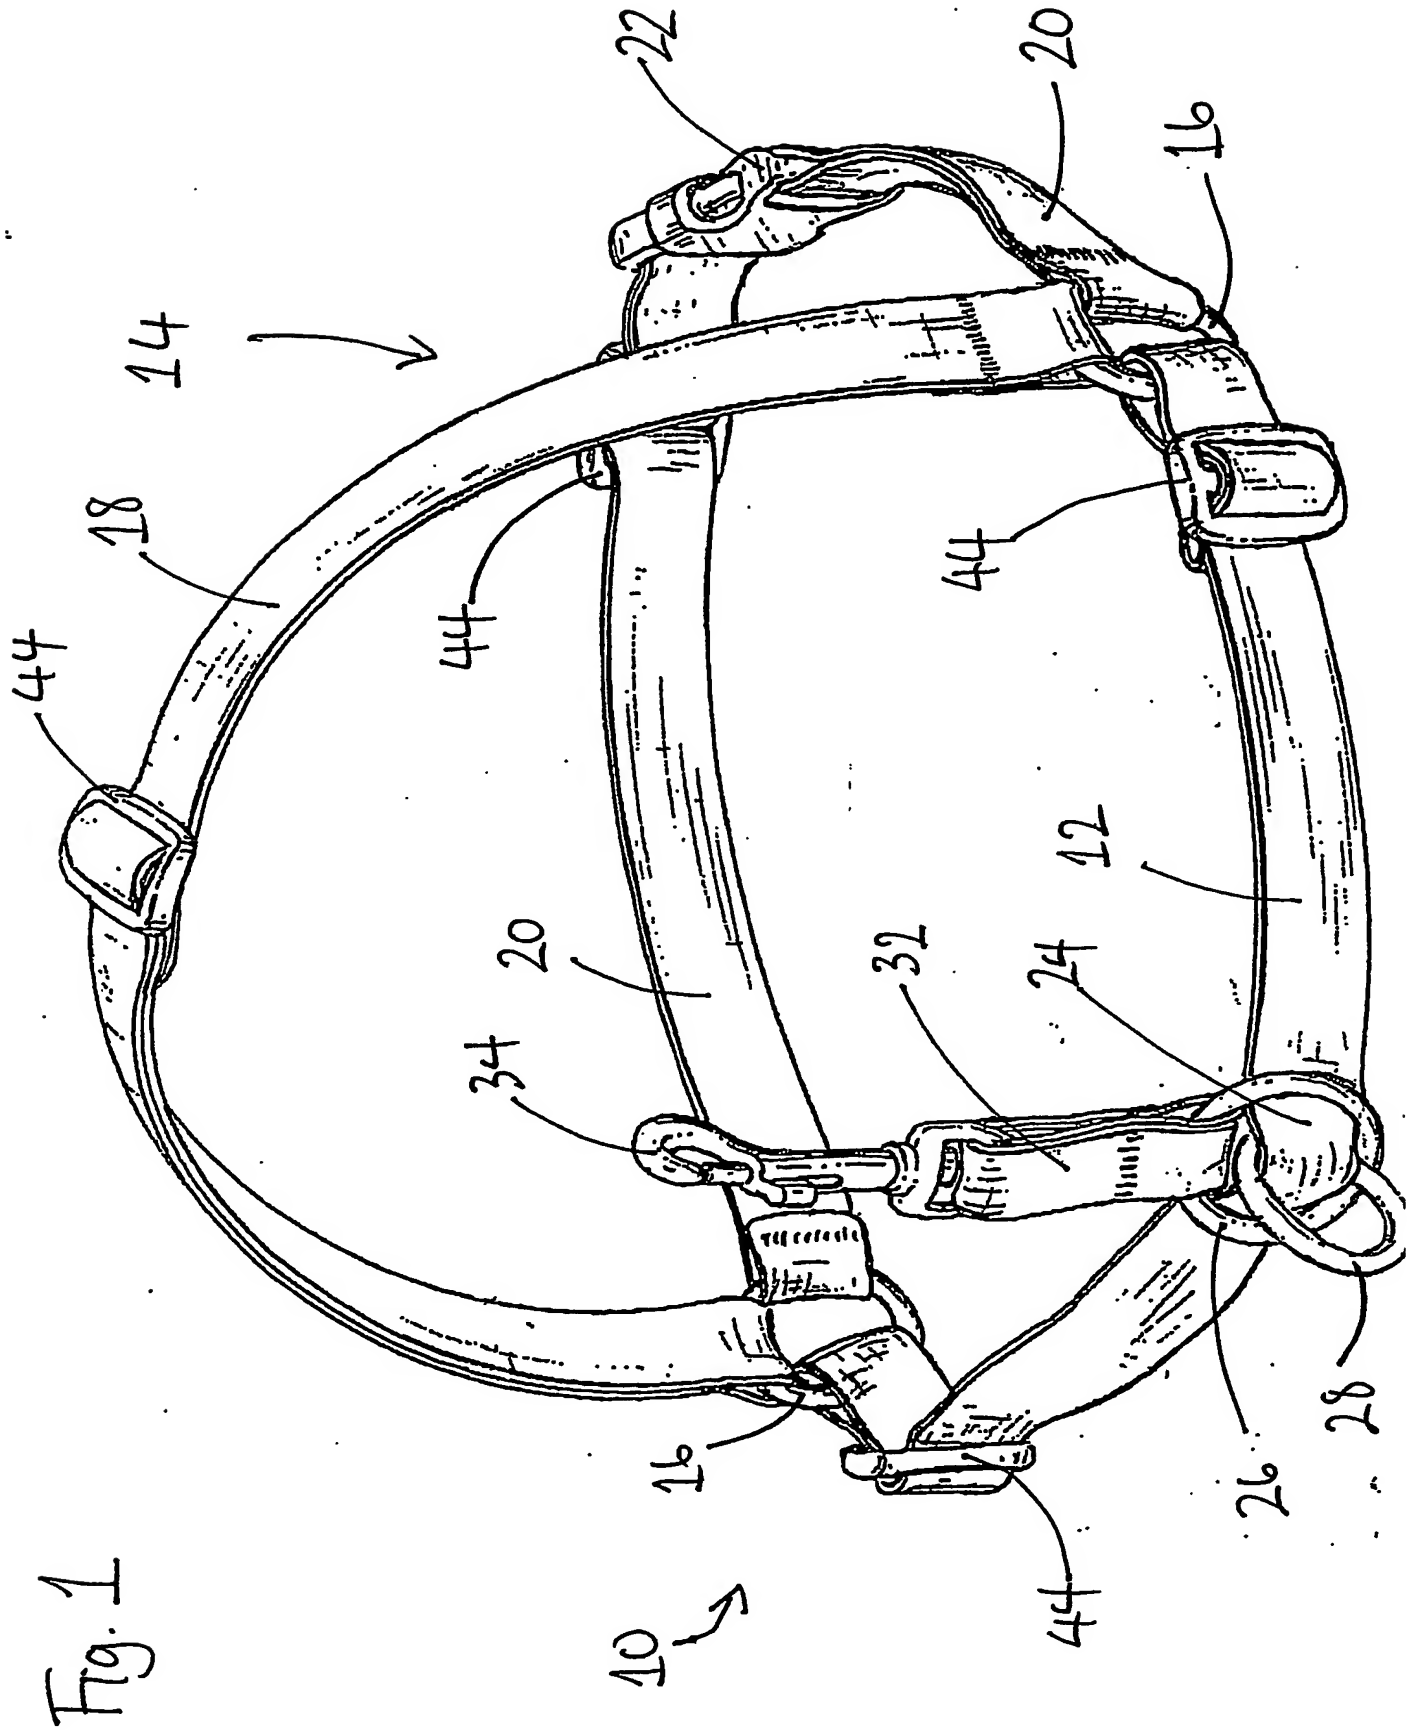


Fig. 1

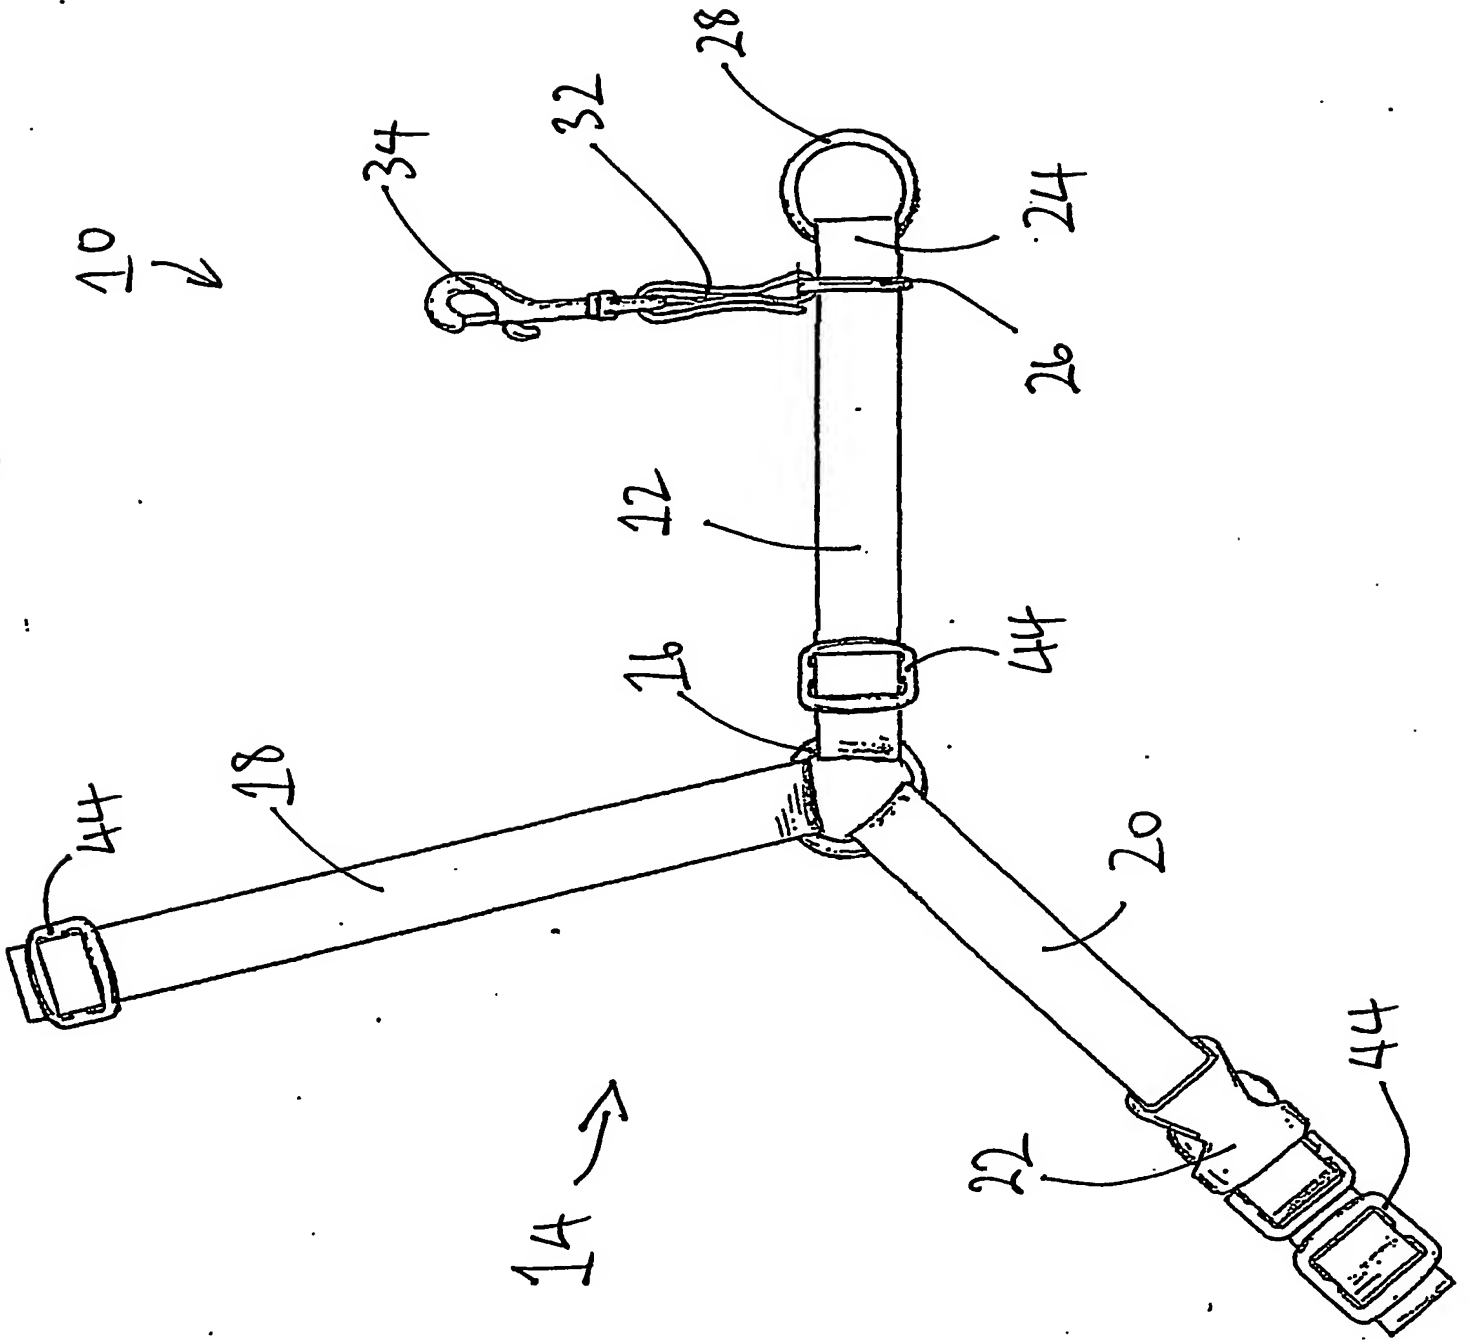
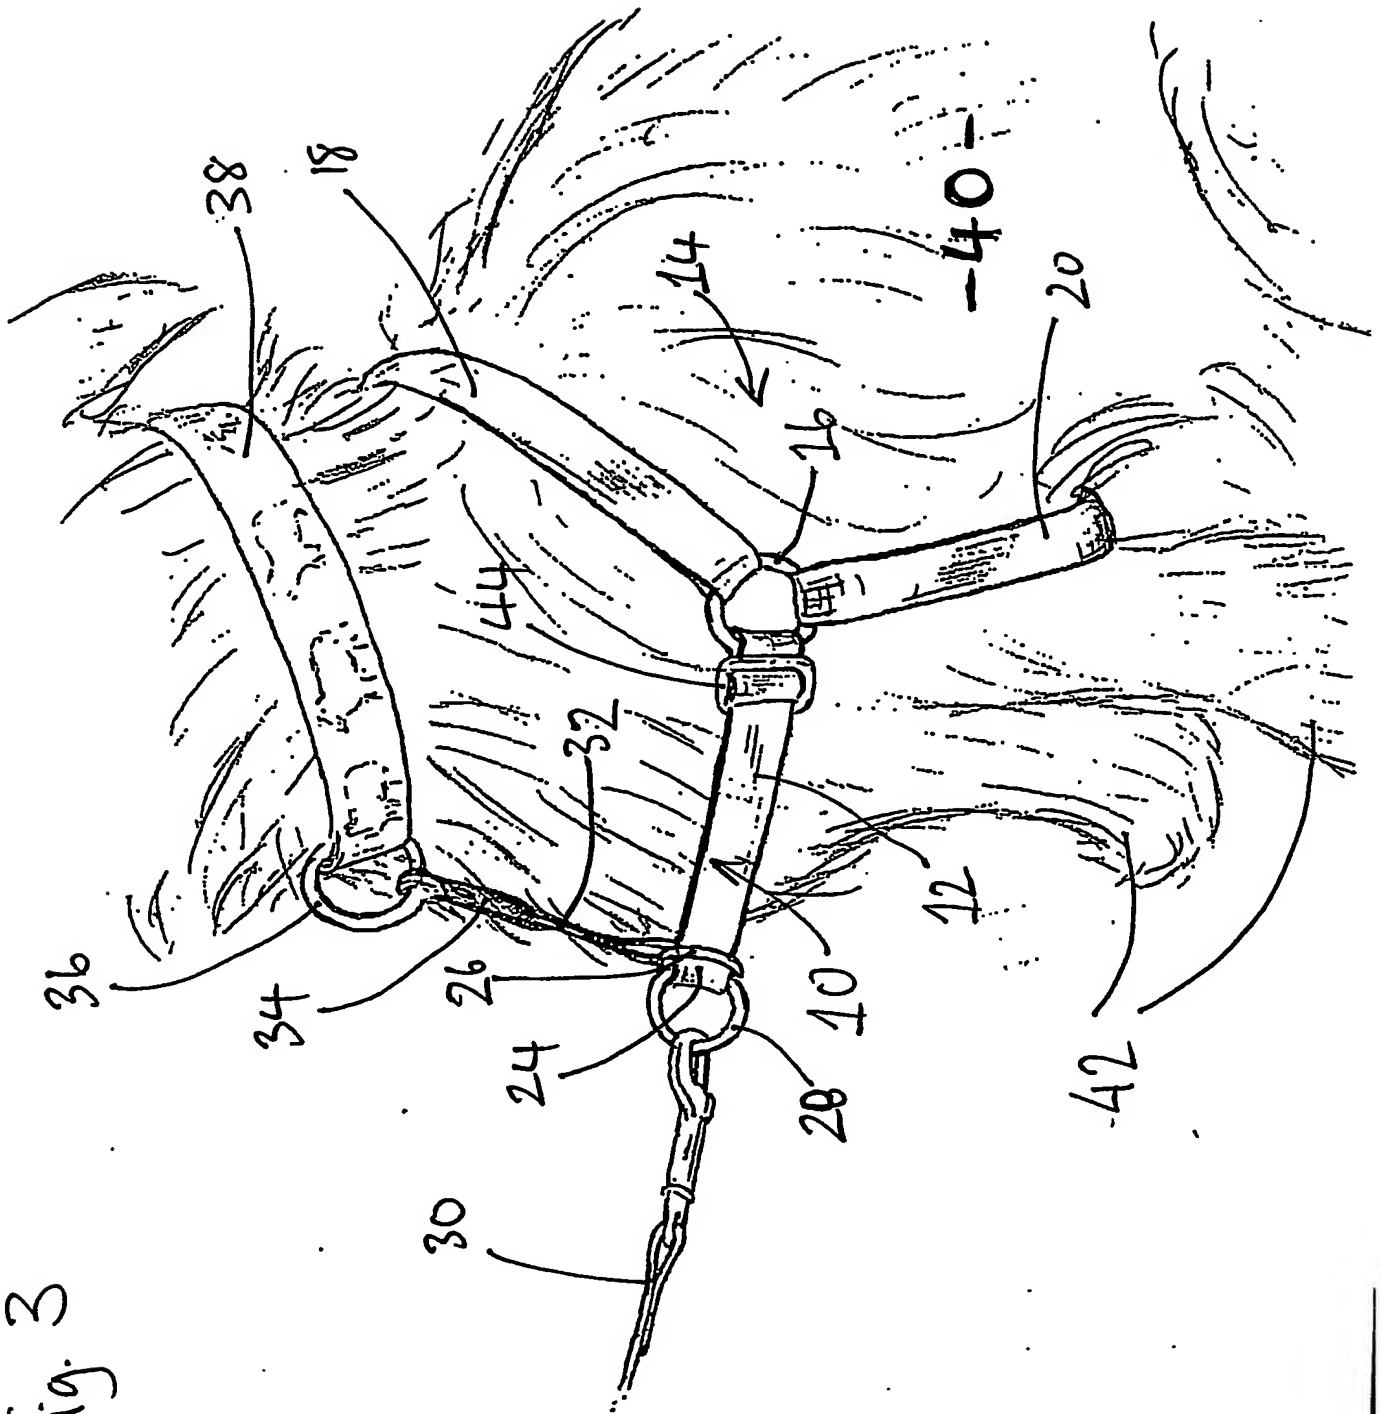
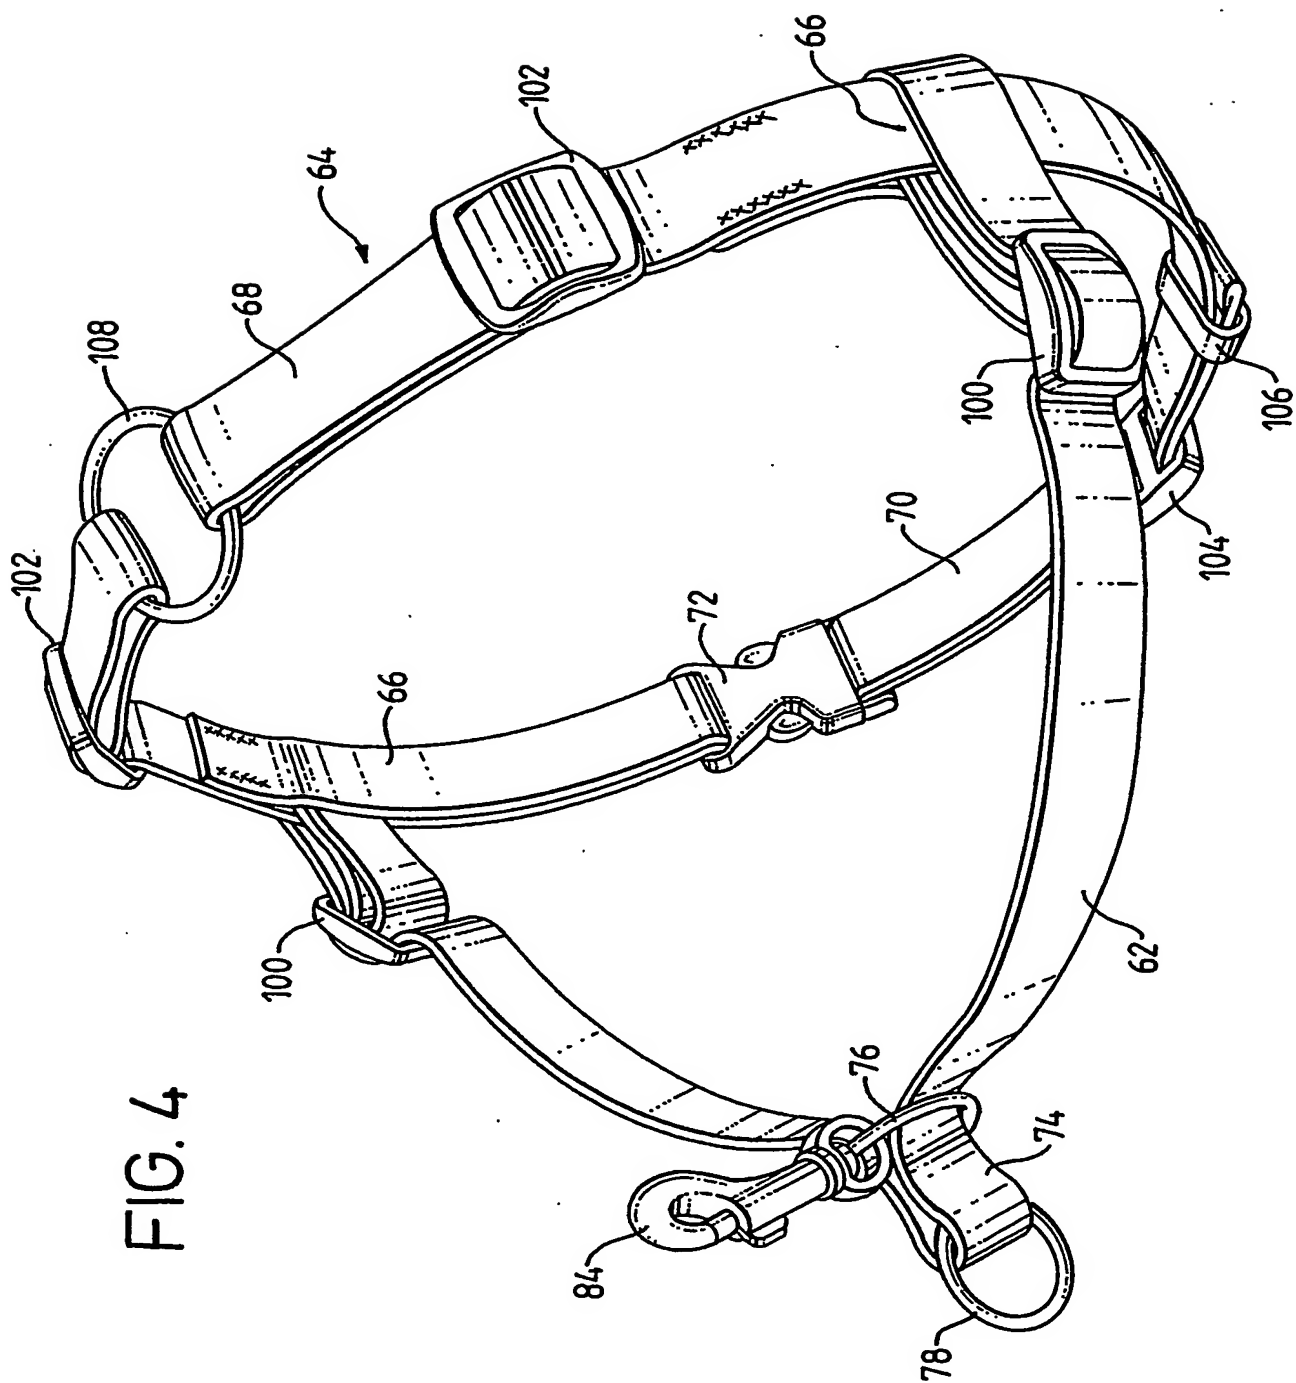


Fig-2

Fig. 3





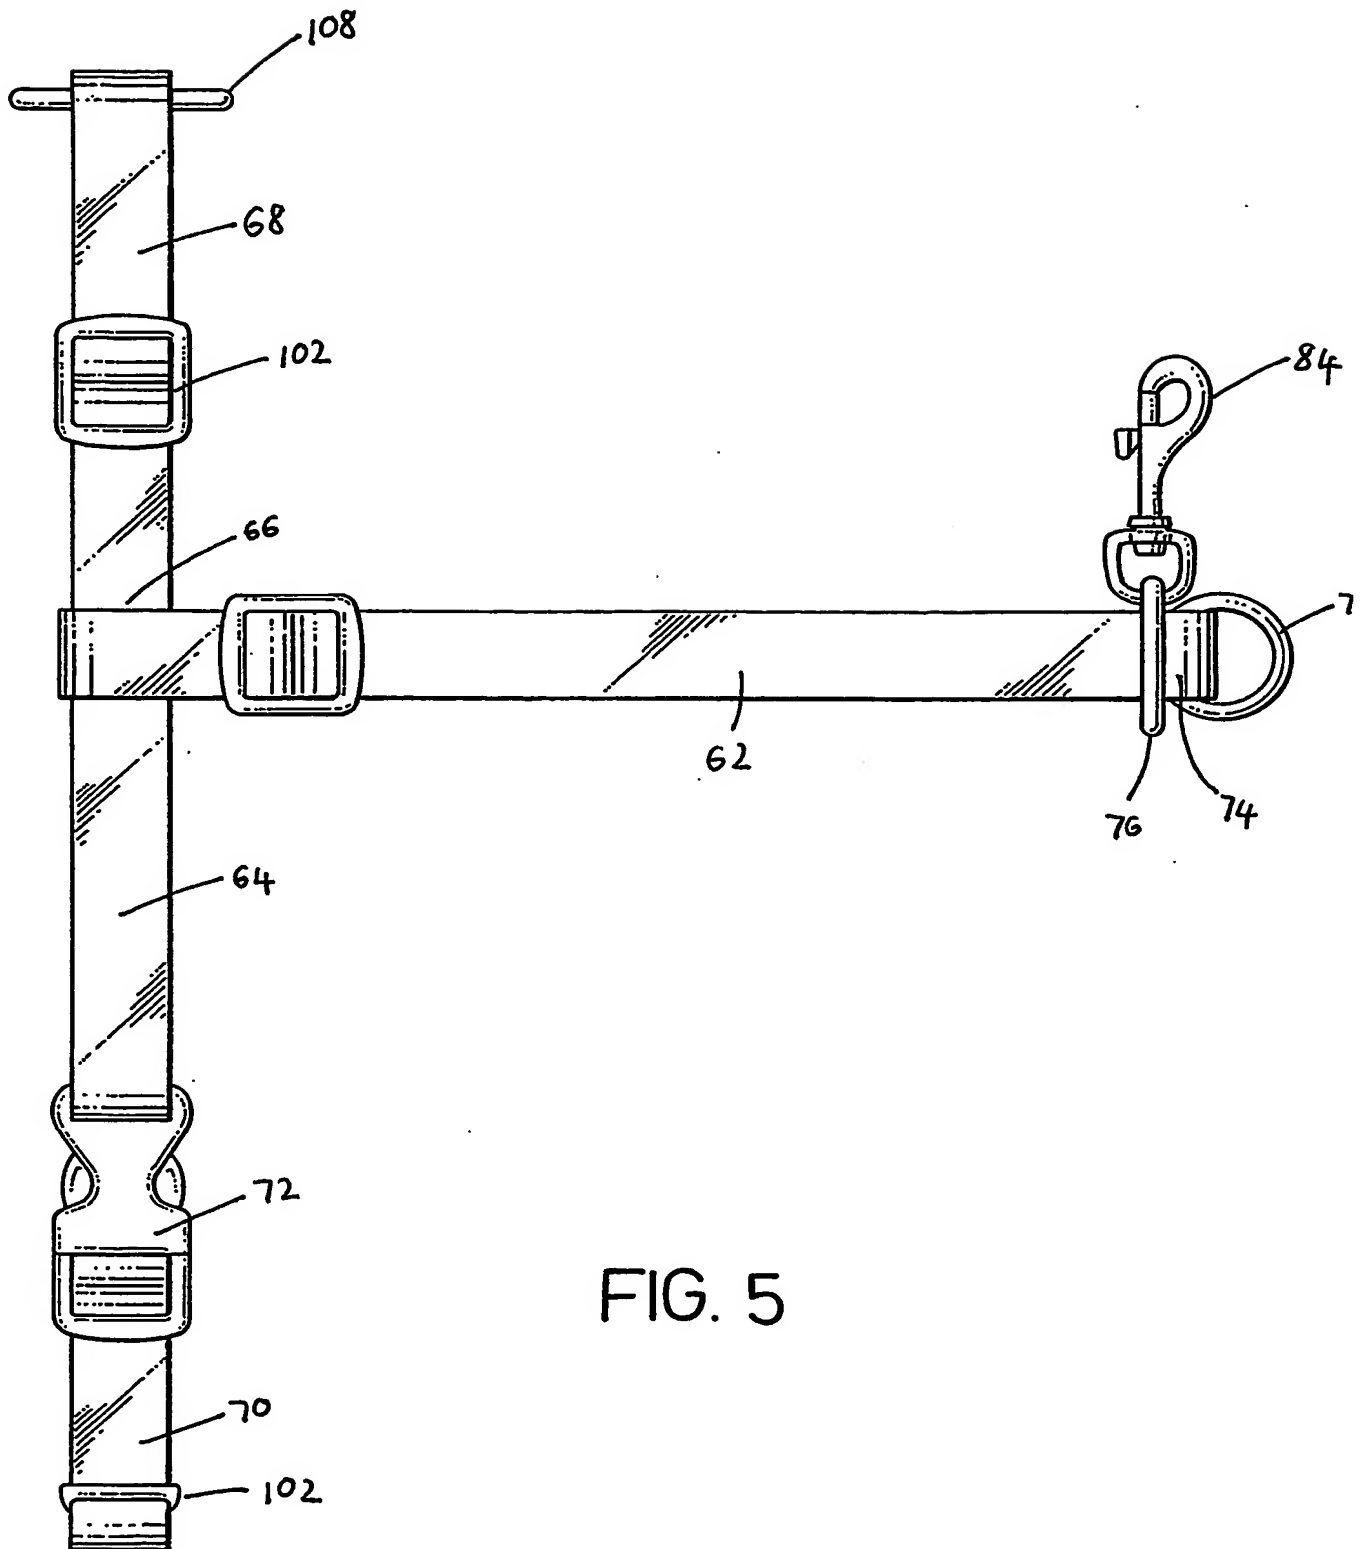


FIG. 5

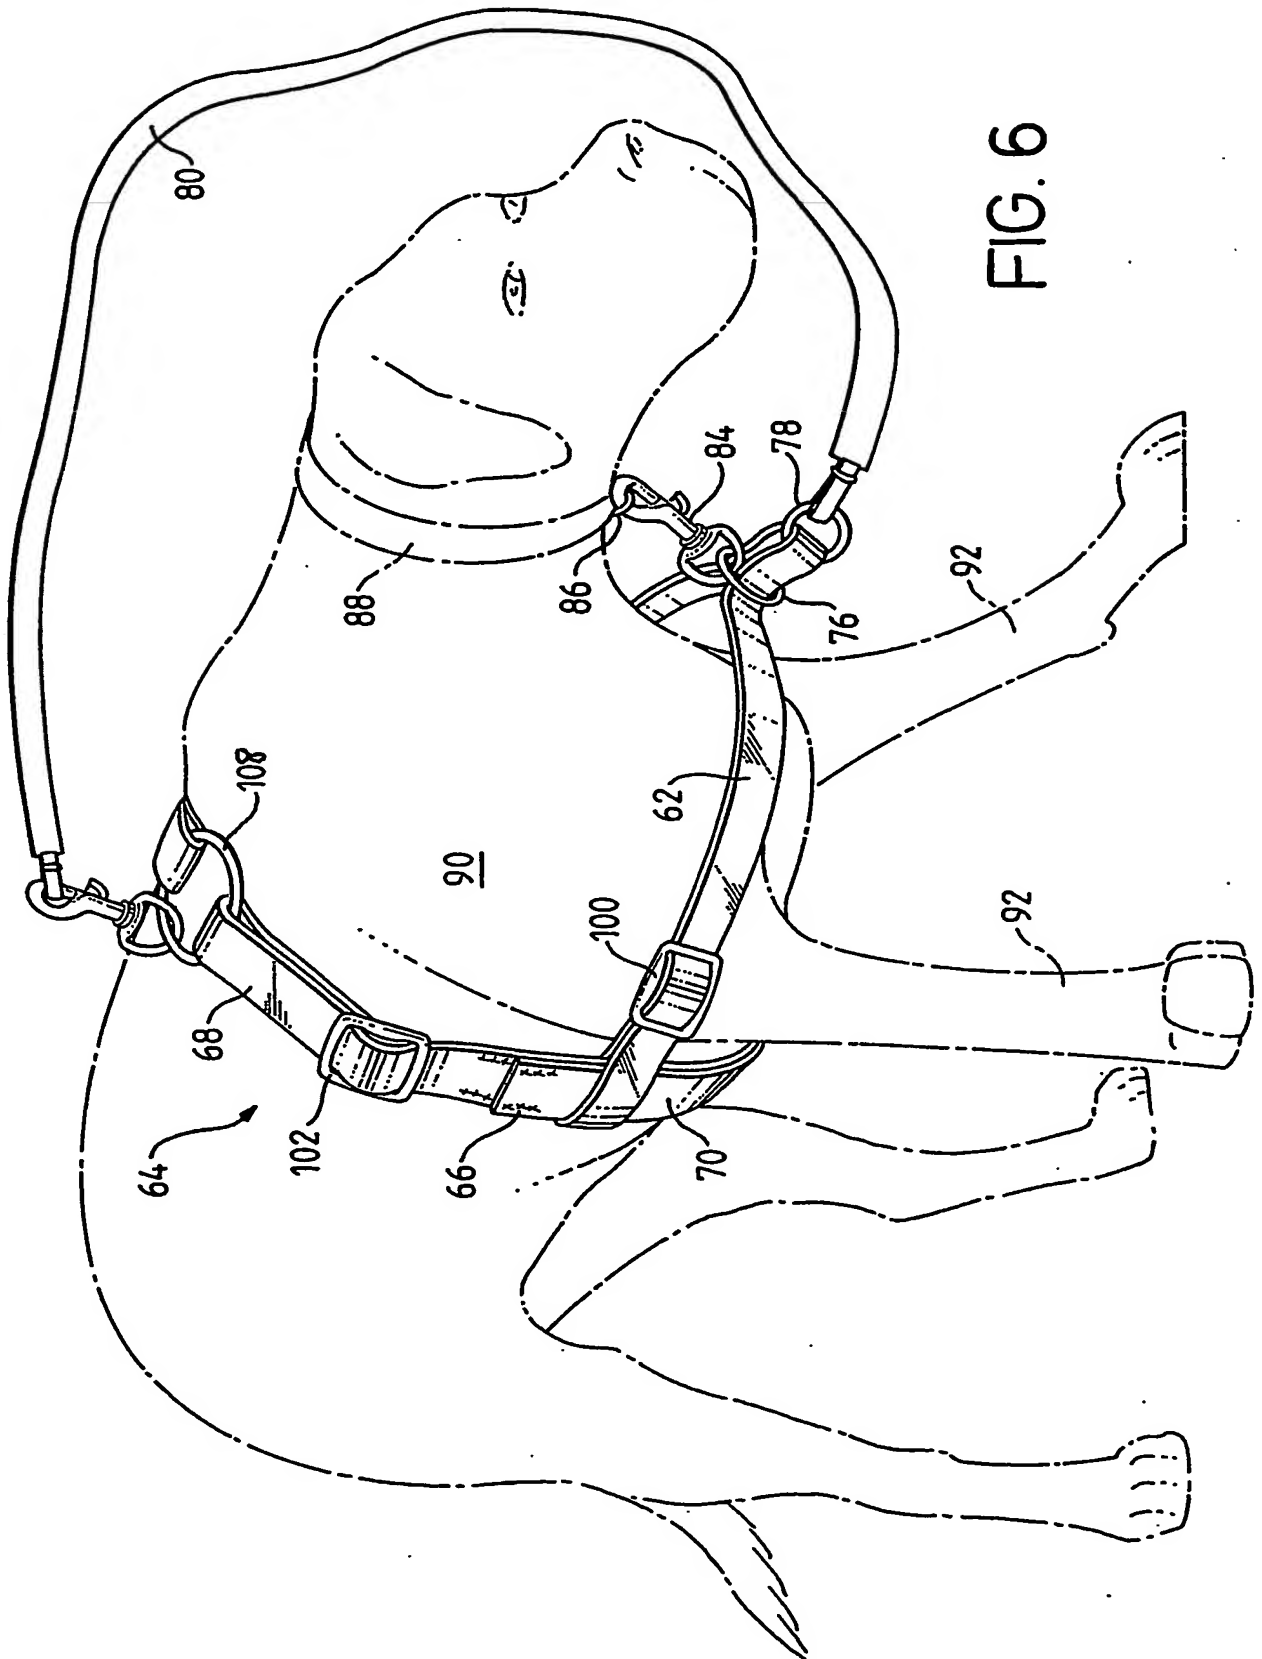


FIG. 6

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB04/004495

International filing date: 22 October 2004 (22.10.2004)

Document type: Certified copy of priority document

Document details: Country/Office: GB
Number: 0403859.2
Filing date: 20 February 2004 (20.02.2004)

Date of receipt at the International Bureau: 19 November 2004 (19.11.2004)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse